

BOX705

Above-counter Internal Cable Solution




BOX705 uses integrated internal retractable cable design, makes the display simple and concise. With display of smart phones, tablets and accessories, it offers retractable cable replacement, brackets adding and lockdown functions to meet needs for different security grades.

BOX705

Features

1. Above-counter internal cable security display with small body, supports horizontal and vertical display, highlights exhibits.
2. Auxiliary security port: one display supplies cross-merchandise accessories with smart phones and tablets.
3. Modular design, security grades as demand, increase display deterrence.

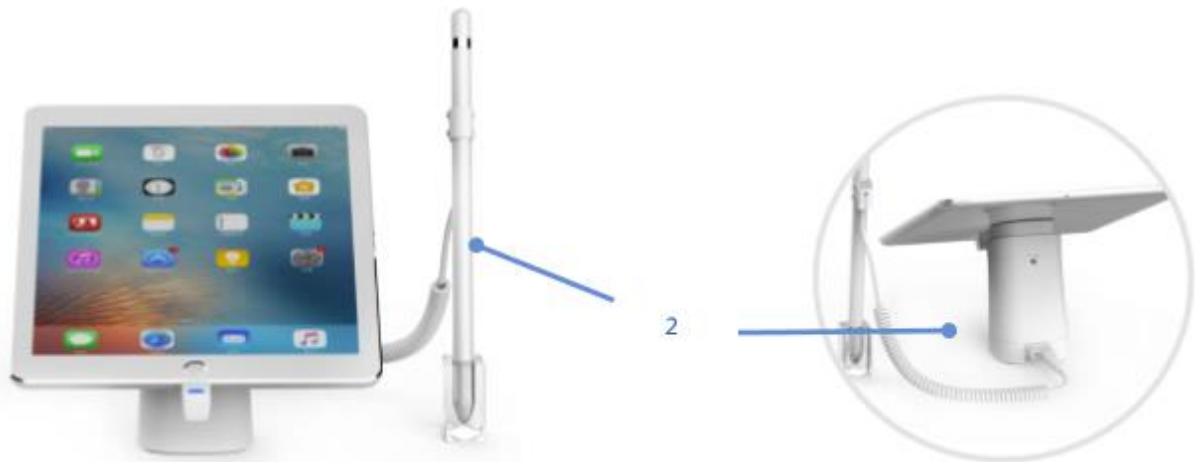

BOX705

Features

- 4. Ultrathin holder, easy to hold.
- 5. Changeable charging cable, reduce costs of changing exhibits with different ports.
- 6. Security screws in holder, easy to removal and no waste of stickers.
- 7. Rotate after lock down, free switch of screen and no wear of cable.

- 8. Two choice of light and smooth cable: plastic cable and steel cable.
- 9. Support ProKEY system, upgrade remote control (remote timeliness/distance/district management).




Performance Parameter			
Power System	5V	Power Ability	Max 1.8~2.0A
Remote Control	2.4G ≥2m (Support ProKey)	Alarm Volume	10cm ≥ 105dB
Internal Battery	200mAH rechargeable lithium-ion battery	Alarming Points	Contact on holer+charging cable USB+Auxiliary port

ProKEY

Features

ProKEY set in a second

remote timeliness/distance/district management

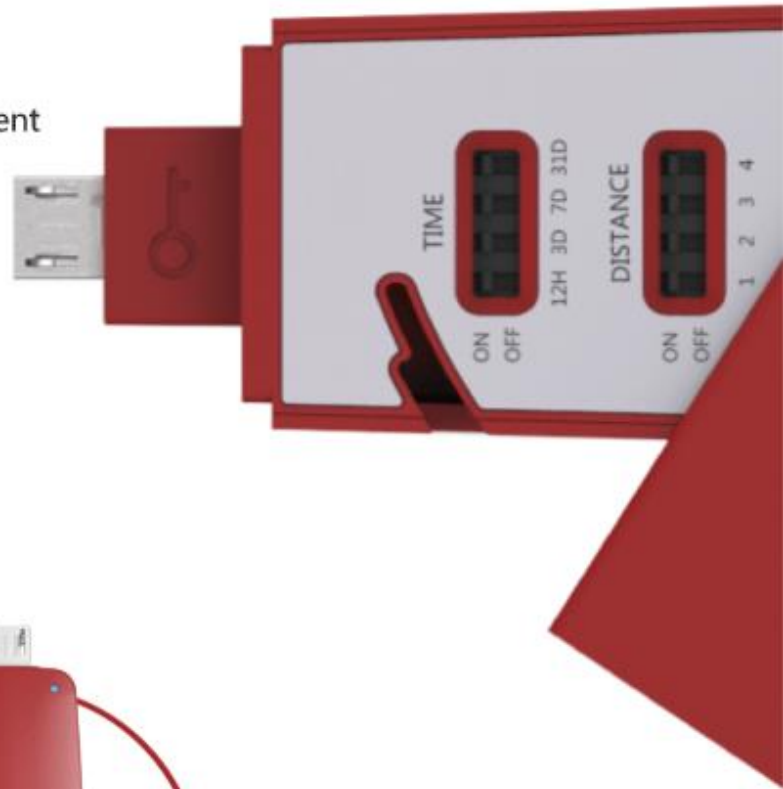

Pro Key

LHT All Series Security Remote Control Management Solution



MAX



FOX



POP



BOX




KEY100B




KEY901B

Specification

- **BOX002W** Base (not include tether assembly)

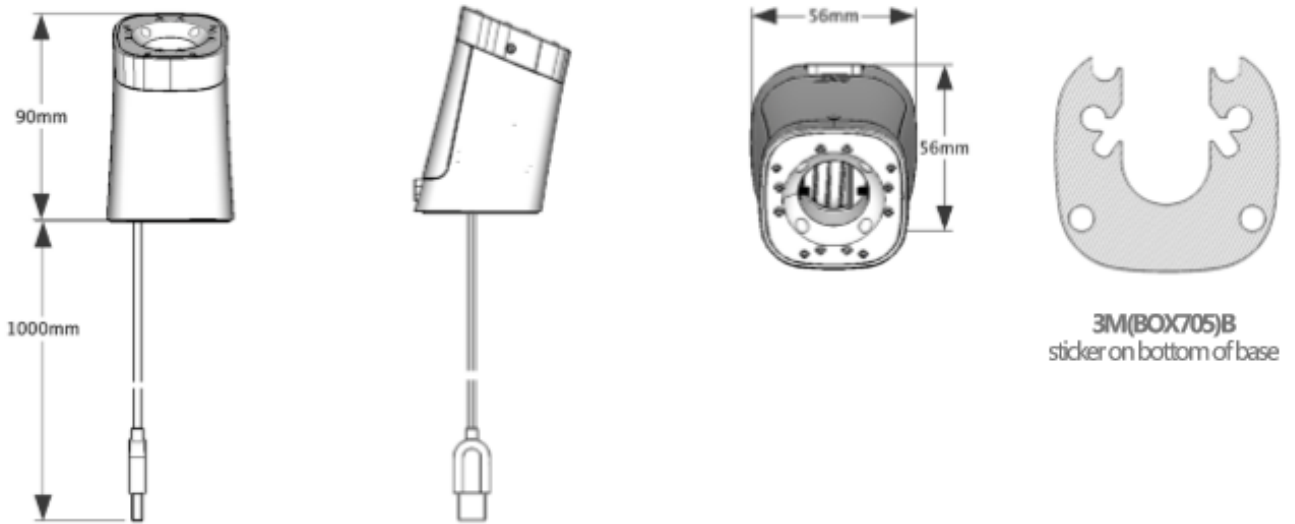

- **BOX151W** Holder

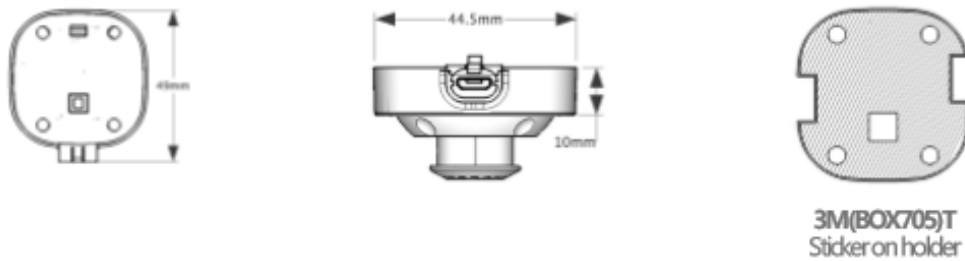

- **BOX132W** Tether Assembly




BOX132W-SS75 Standard tether assembly
2 core ϕ 3.0mm 75 cm cable, outside cable 70cm

BOX132W-HS65 Steel tether assembly
2 core ϕ 3.4mm 65 cm cable, outside cable 60cm

Specification


- Charging Cable



ChargingW-C25-Micro




ChargingW-C25-typeC




ChargingW-C25-Lightning


- BOX120W Holder with 2-bracket

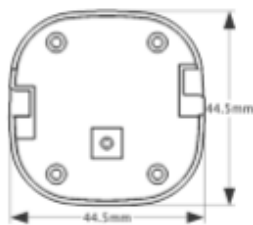


BOX120W(No bracket)

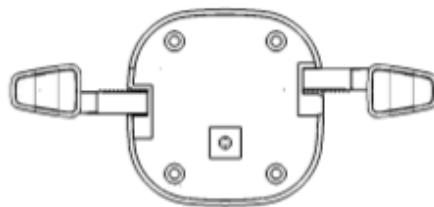


BOX120W-H1

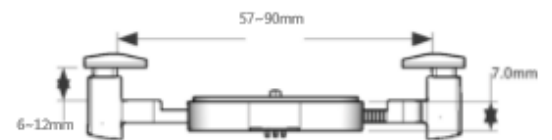


- BOX121W Holder with 4-bracket

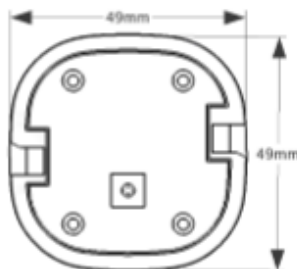


BOX121W(No bracket)

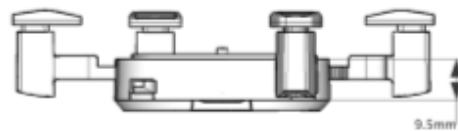


BOX121W-H1V1 : width (57~90mm) height (110~190mm)
 BOX121W-H2V2 : width (88~155mm) height (180~330mm)
 BOX121W-H3V2 : width (150~250mm) height (180~330mm)

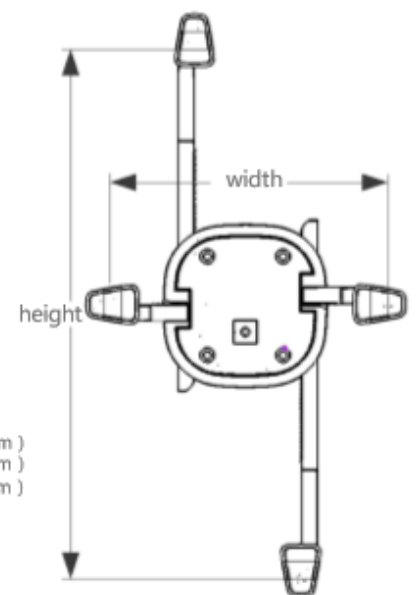

- Installation with Screws

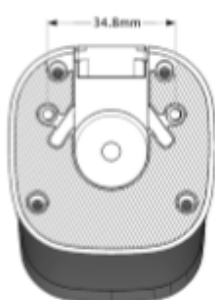

Drill hole $\phi 4$ mm
 Distance 34.8mm

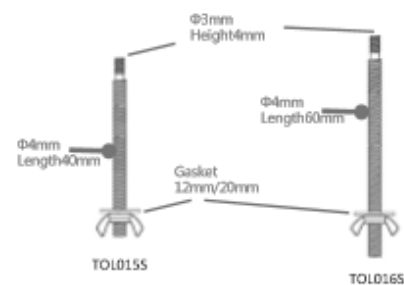

Components List

- Holder and Brackets



BOX151W
Holder



ChargingW-C25-Micro
ChargingW-C25-typeC
ChargingW-C25-Lightning



BOX120W(No bracket)
BOX120W-H1

2-Bracket Holder



BOX121W(no bracket)
BOX121W-H1V1
BOX121W-H2V2
BOX121W-H3V2

4-Bracket Holder

- Tether Assembly



BOX132W-SS75
2-core ϕ 30 mm 75cm Standard Tether



BOX132W-HS65
2-core ϕ 34 mm 65cm Steel Tether

- Base Stand



BOX002W
Without Tether Assembly



BOX002W-SS75
With Standard Tether Assembly



BOX002W-HS65
With Steel Tether Assembly

- Model Definition



BOX705W-SS

BOX002W + BOX132W-SS75+ BOX151W
Security Stand with Standard Tether
No Charging Cable

BOX705W-HS

BOX002W + BOX132W-HS75+ BOX151W
Security Stand with Steel Tether
No Charging Cable