


StoreProtect Plexi Solo

New AM solution

- All electronics included in the antenna base.
- No external controller box needed.
- One Solo antenna can power two passive antennas.

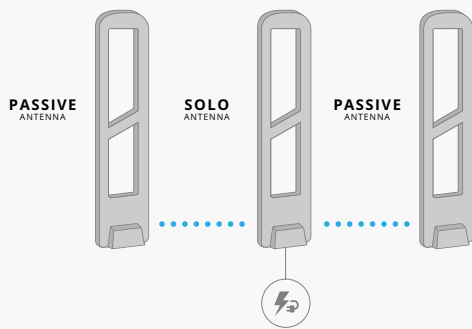

Antenna Features

- Transparent acrylic antenna frame
- Scratch resistant metal covers

Antenna Specifications

- Width..... 428 mm
- Height..... 1562 mm
- Thickness..... 20 mm
- Thickness at base..... 148 mm
- Net Weight..... 20,5 kg
- Gross Weight..... 23,5 kg

Add-ons

- Active
- Passive
- Remote Service v4
- Black base
- Etched logo
- Protection buffers

Specifications

- Quick and easy installation
- Approvals: CE, CB
- Power consumption 28W 120mA / 230V_{AC}

Transmitter

- Operating Frequency..... 58kHz
- Transmit Burst Duration..... 1ms
- Max. Transmit Current..... 15A peak
- Burst Repetition Rate
(Based on 50Hz net)..... 25Hz
(Based on 60Hz net)..... 30Hz

Receiver

- Center Frequency..... 58kHz
(software adjustable bandwidth in steps of 100Hz)
- Receiver Coil Resistance..... 1,2Ω

Alarm

- Audio level (adjustable)..... 95dBA


Environmental

- Ambient Temperature..... 0°C to 50°C
(32°F to > 122°F)
- Relative Humidity..... 0 to 90%
Non-condensing

Dimensions

Antenna

All dimensions in mm.

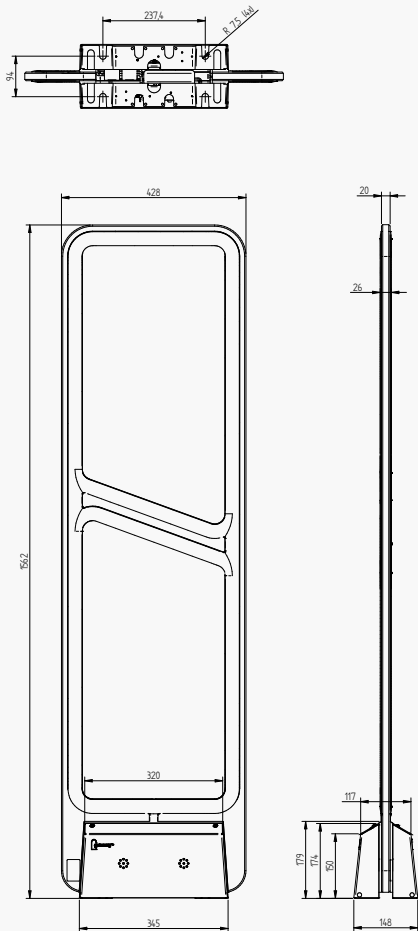

AUTHORIZED DEALER

Gunnebo Gateway AB is a Swedish supplier of anti-theft systems for the retail sector worldwide. We are the only company to develop, manufacture and market solutions built on every existing form of Electronic Article Surveillance (EAS) technology.